


High quality PP materials are used in the production of HBAFs. They can be used in bathroom walls or windows.

MOTOR INSULATION CLASS	F CLASS
MOTOR PROTECTION CLASS	IP 25
MOTOR EFFICIENCY CLASS	IE2
MOTOR ENCLOSURE TYPE	EXTERNAL ROTOR MOTOR
MOTOR BRAND	
BODY MATERIAL	PP
BODY COATING	OPTIONAL
IMPELLER MATERIAL	PP
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMPERATURE	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1

WITH BACKVALVE MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
HBAF 100	230	50	14	2.800	97	35	
HBAF 125	230	50	16	2.800	183	36	
HBAF 150	230	50	16	2.800	290	38	

Values are for 0 Pa.


DRAWING

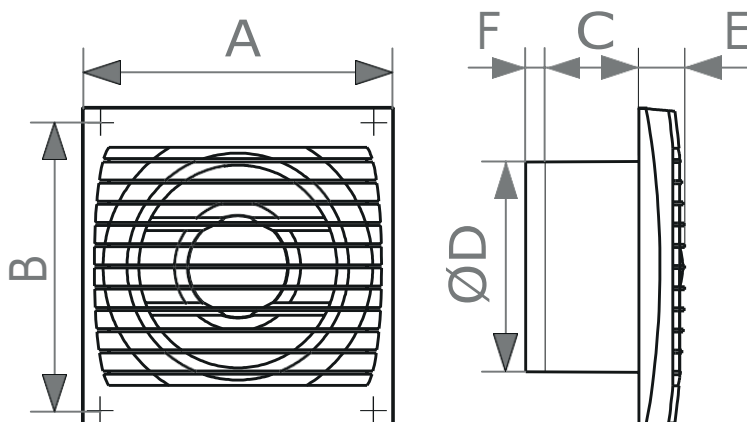


MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
HBAF 100	150	135	55	100	22	7
HBAF 125	175	160	61	125	23	8,5
HBAF 150	200	185	62	150	24	10

PERFORMANCE CURVES

HBAF 100

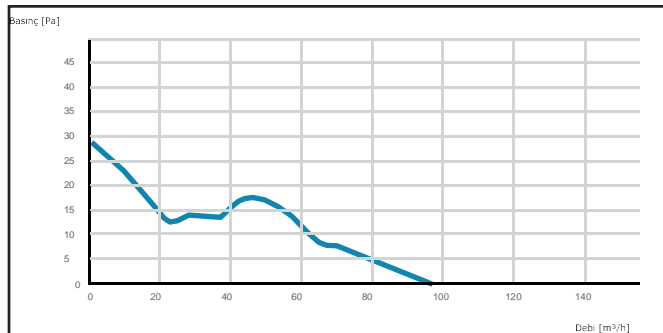

HBAF 125

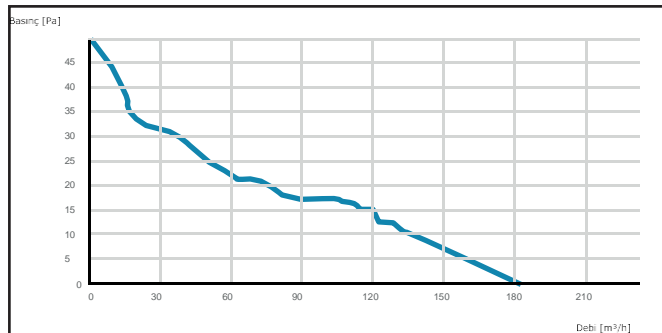

HBAF 150

