

HPMX Round Duct Fan



Description :

HPMX is an ideal choice with its easy installation to the duct, silent operation and low energy consumption. Factory, hospital, office, laboratory, shopping mall, cafe, restaurants, parking lot, etc. It is suitable for use in all structures with a round duct system.


MOTOR PROTECTION CLASS	IP 44
MOTOR INSULATION CLASS	F CLASS
MOTOR EFFICIENCY CLASS	-
MOTOR ENCLOSURE TYPE	AC EXTERNAL ROTOR MOTOR
IMPELLER TYPE	MIXED FLOW
BODY - IMPELLER MATERIAL	PLASTIC
BODY COATING	NONE
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMP	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1



TECHNICAL SPECIFICATIONS AND DRAWING

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REV. (RPM)	FLOW RATE (m3/h)	SOUND PRESSURE dB(A) 3m	WEIGHT (KG)
HPMX 100	230	50	54	2.460	234	41	2.5
HPMX 125	230	50	56	2.560	337	46	2.6
HPMX 150	230	50	75	2.490	504	48	3.1
HPMX 160	230	50	75	2.490	560	49	3.1
HPMX 200	230	50	111	2.410	1.012	54	4.7


Values are for 0 Pa

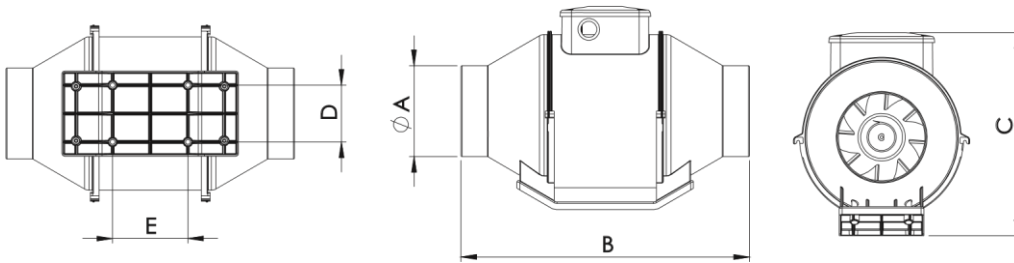


MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
KMX 100	96	306,5	215	60	80
KMX 125	121	260	215	60	80
KMX 150	146	290,5	242	60	80
KMX 160	156	271	242	60	80
KMX 200	191	300	263	94	100

HPMX Performance Curves


HPMX 100

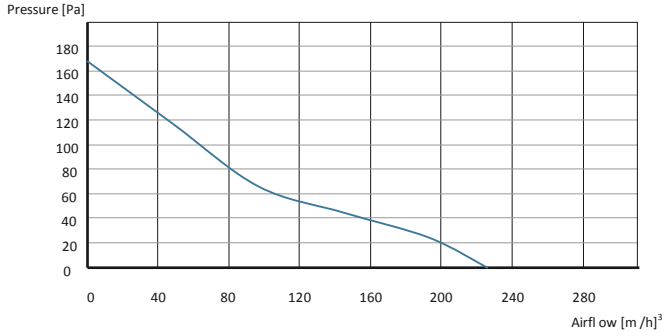


HPMX 125

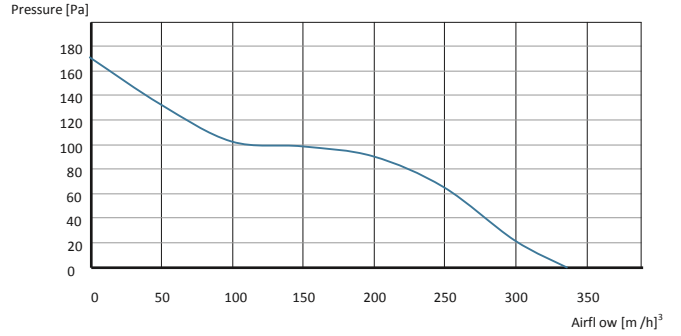

HPMX 150

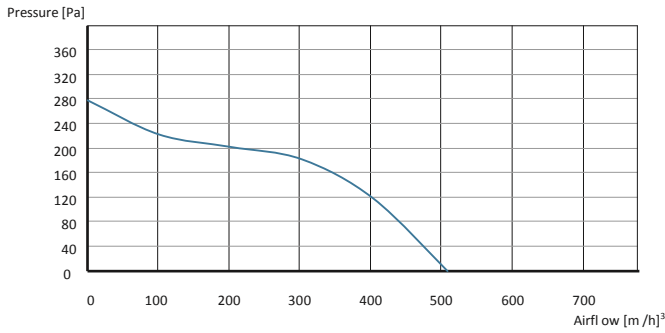

HPMX 160

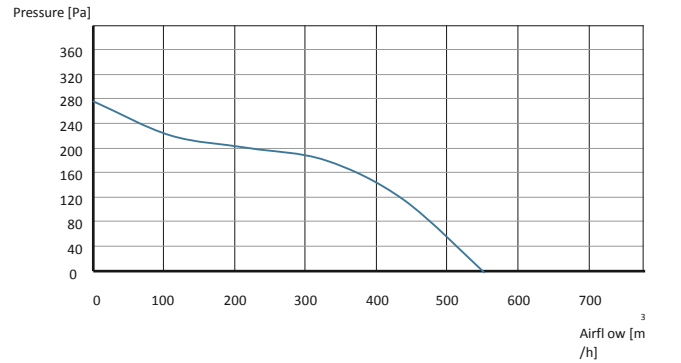

HPMX 200

