




High quality ABS materials are used in the production of HSEFs. They can be used in bathroom walls or windows. With a low-noise level they won't be disturbing the occupants.




| | |
|-----------------------------|----------------------------|
| MOTOR INSULATION CLASS | F CLASS |
| MOTOR PROTECTION CLASS | IP 25 |
| MOTOR EFFICIENCY CLASS | IE2 |
| MOTOR ENCLOSURE TYPE | EXTERNAL ROTOR MOTOR |
| MOTOR BRAND | |
| BODY MATERIAL | ABS |
| BODY COATING | OPTIONAL |
| IMPELLER MATERIAL | ABS |
| DUTY CYCLE | IEC Duty Cycle-S1 |
| WORKING AMBIENT TEMPERATURE | -20 - +50 °C |
| DIRECTIVE | IEC-60335-2-80, ISO 1940-1 |

| MODEL | VOLTAGE (V) | FREQUENCY (Hz) | POWER (W) | REVOLUTION (rpm) | FLOW RATE (m³/h) | NOISE LEVEL (dB(A)) | PRICE |
|----------|-------------|----------------|-----------|------------------|------------------|---------------------|-------|
| HSEF 100 | 230 | 50 | 8,4 | 2.800 | 90 | 25 | |
| HSEF 125 | 230 | 50 | 10 | 2.800 | 180 | 30 | |

Values are for 0 Pa.


DRAWING

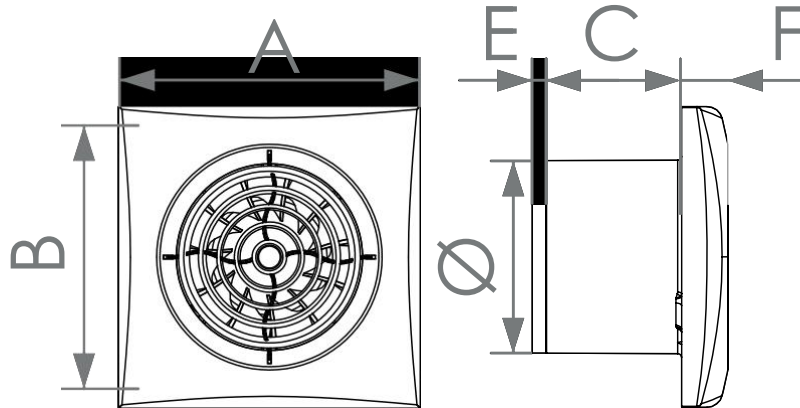

| MODEL | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|----------|--------|--------|--------|--------|--------|--------|
| HSEF 100 | 155 | 135 | 70 | 100 | 7 | 24 |
| HSEF 125 | 175 | 155 | 78 | 125 | 8,5 | 24 |

PERFORMANCE CURVES

HSEF 100

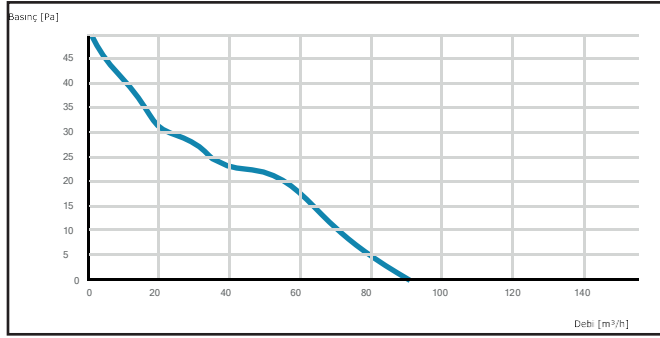

HSEF 125

