

PTS Circular Inline Silent Bathroom Fan



Description :

High quality PP materials are used in the production of PTS's. They can be used in bathroom walls or windows.

MOTOR PROTECTION CLASS	IP 25
MOTOR INSULATION CLASS	F CLASS
MOTOR EFFICIENCY CLASS	IE2
MOTOR ENCLOSURE TYPE	EXTERNAL ROTOR MOTOR
BODY MATERIAL	PP
BODY COATING	OPTIONAL
IMPELLER MATERIAL	PP
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	IEC-60335-2-80, ISO 1940-1




TECHNICAL SPECIFICATIONS

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (KW)	REV. (RPM)	FLOW RATE (m3/h)	SOUND PRESSURE dB(A) 3m	WEIGHT (KG)
PTS 100	230	50	14	2.800	107	35	0.6
PTS 125	230	50	18	2.800	190	36	0.7
PTS 150	230	50	22	2.800	300	38	0.9
PTS 160	230	50	22	2.800	300	38	1.1

Values are for 0 Pa


TECHNICAL DRAWING

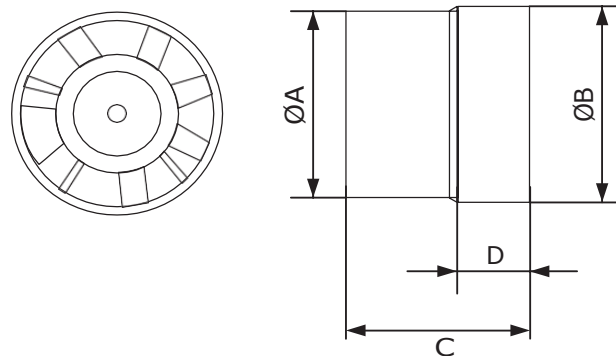


MODEL	A (mm)	B (mm)	C (mm)	D (mm)
PTS 100	100	103	80	30
PTS 125	125	128	87	30
PTS 150	150	153	101	35
PTS 160	160	163	101	35

PTS Performance Curves


PTS 100

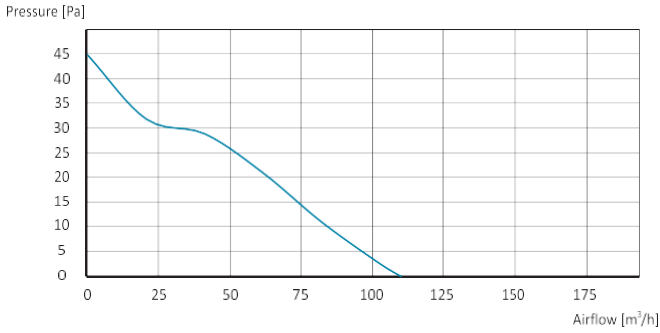

PTS 125

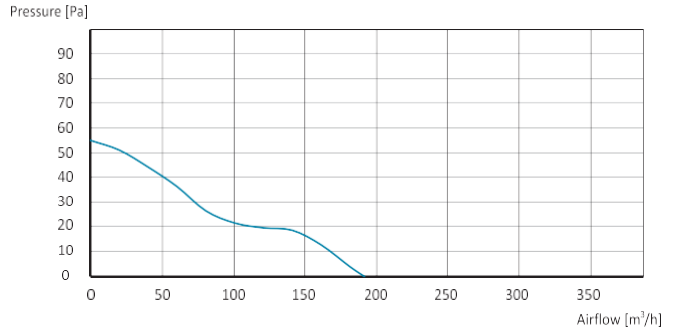

PTS 150

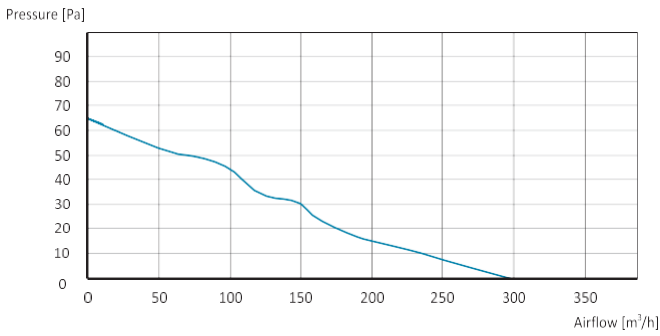

PTS 160

