



HPAD Wall Mounted Axial Fan With Shutte

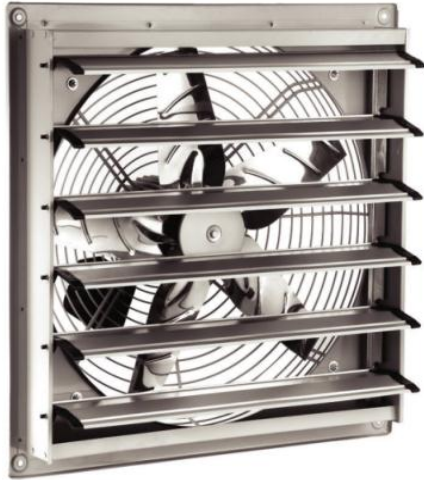

HPAD fans can be easily mounted on the walls with its square body. Standard fan has grille guard and and powder coating. Blades are stainless steel.



MOTOR INSULATION CLASS	B CLASS
MOTOR PROTECTION CLASS	IP 44
MOTOR EFFICIENCY CLASS	IE2-IE3
MOTOR ENCLOSURE TYPE	
MOTOR BRAND	GAMAK-VOLT-WATT
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	ELECTROSTATIC POWDER PAINT
IMPELLER MATERIAL	STEEL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING AMBIENT TEMPERATURE	-20 - +50 °C
DIRECTIVE	IEC-60335-2-80, ISO 1940-1

MODEL	VOLTAGE (V)	FREQUENCY (Hz)	POWER (W)	REVOLUTION (rpm)	FLOW RATE (m³/h)	NOISE LEVEL (dB(A))	PRICE
HPAD 300-2K-M	230	50	215	2800	4850	70	
HPAD 300-2K-T	380	50	135	2850	5100	70	
HPAD 300-4K-M	230	50	130	1400	2200	53	
HPAD 300-4K-T	380	50	125	1400	2200	53	
HPAD 400-4K-M	230	50	200	1400	4550	58	
HPAD 400-4K-T	380	50	180	1450	4800	58	
HPAD 500-4K-M	230	50	230	1400	6900	63	
HPAD 500-4K-T	380	50	220	1450	7400	63	
HPAD 600-4K-M	230	50	560	1400	10150	66	
HPAD 600-4K-T	380	50	450	1450	10250	66	
HPAD 700-4K-M	230	50	750	1400	13150	68	
HPAD 700-4K-T	380	50	870	1400	13150	68	
HPAD 800-4K-M	230	50	1100	1400	15500	72	
HPAD 800-4K-T	380	50	1280	1400	15500	72	

Values are for 0 Pa.

Tip / Type	A	B	C	D	E
HPAD 300-2K	400X400	315	300	300	65
HPAD 300-4K	400X400	315	300	300	65
HPAD 400-4K	500X500	415	408	400	90
HPAD 500-4K	600X600	525	495	500	105
HPAD 600-4K	700X700	630	585	600	110
HPAD 700-4K	850X850	710	685	700	110
HPAD 800-4K	950X950	810	785	800	125

Dimensional Drawings

